



# Maylong M-270 Motherboard Replacement

Written By: Adam Sanders






## TOOLS:



- [Spudger](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Motherboard

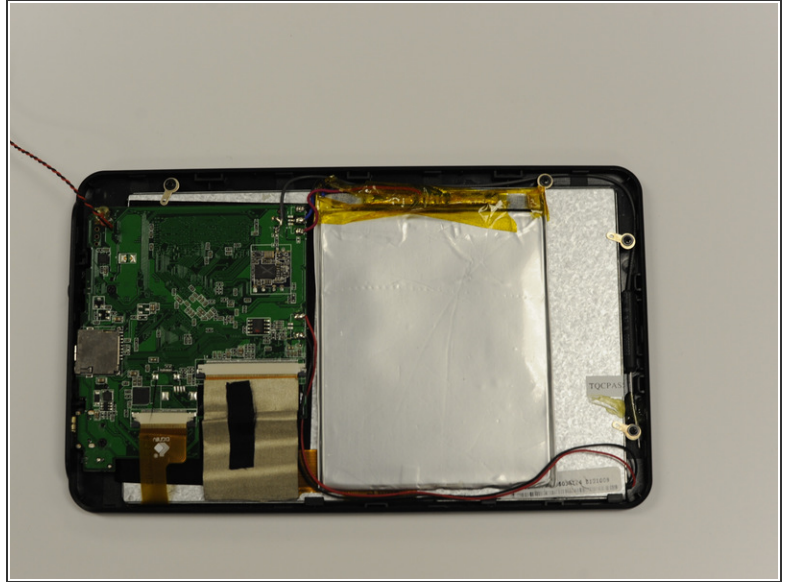

- Use the plastic opening tool to separate the back cover plate from the front.
- Insert the plastic opening tool in between the back plate cover and the top cover, then slide along edges to pry open.



## Step 2

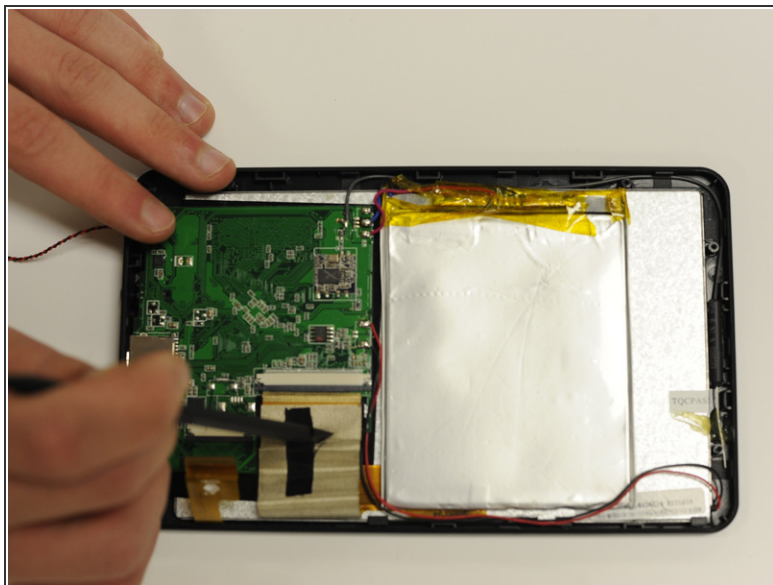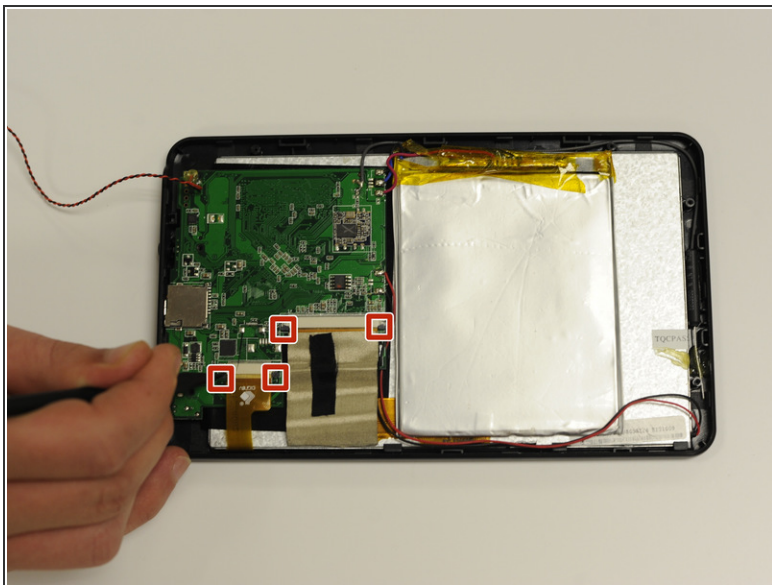

- Locate the two ribbons attached to the device's motherboard. <Add color to point out where they are>
- Flip the small black plastic catches down by using the small end of the spudger. <Add more pictures flipping it back if you can>
- Remove the ribbons by gently pulling them away from the motherboard. <Picture with it off>




## Step 3

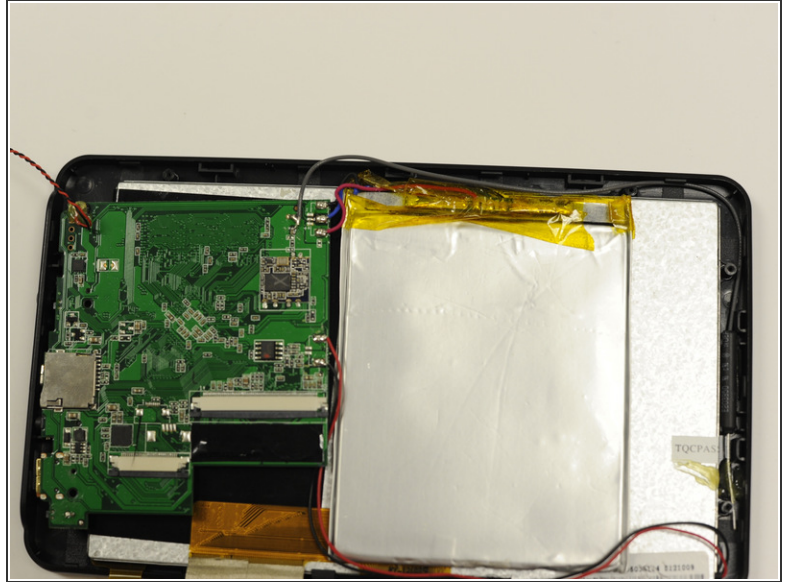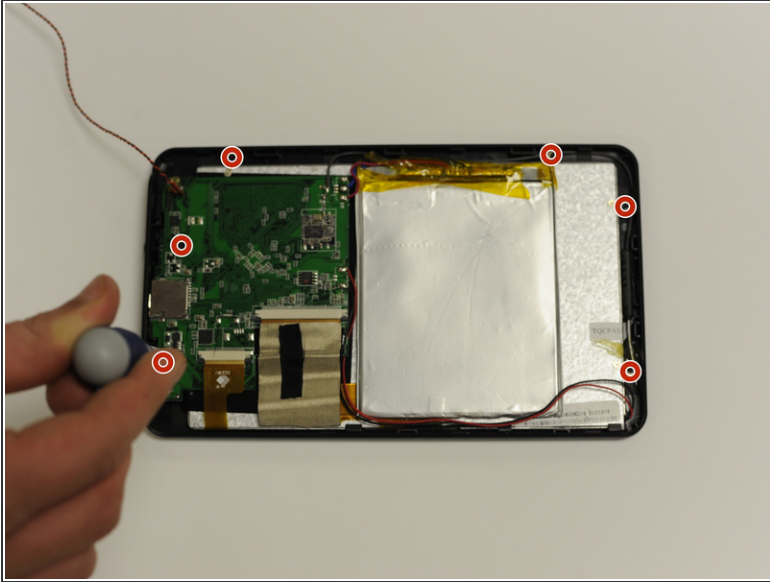

- Remove the two screws from the motherboard.
- Remove the four screws and metal holds from the edge of the device.

## Step 4

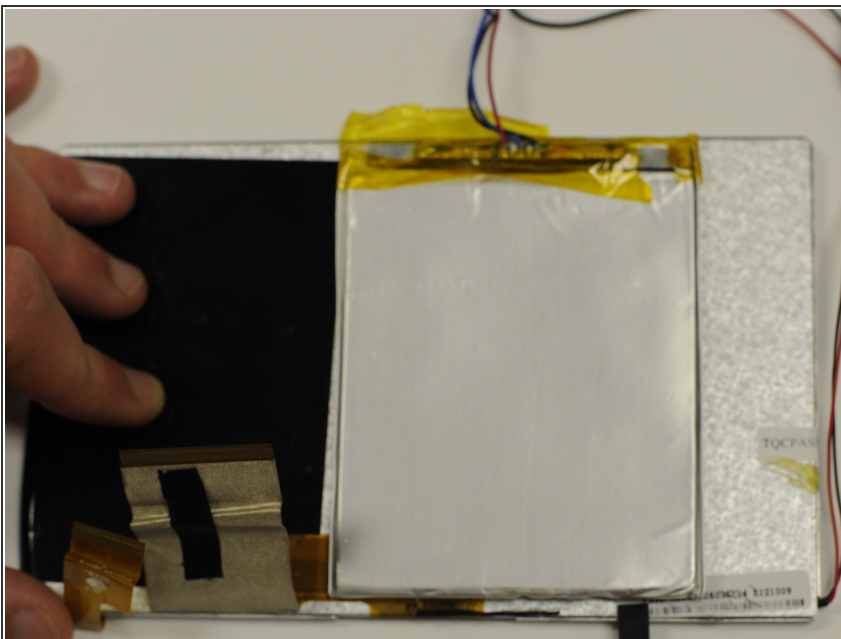

- Remove the motherboard by gently pulling it away from the bottom of the device.

To reassemble your device, follow these instructions in reverse order.

